



# Product Data

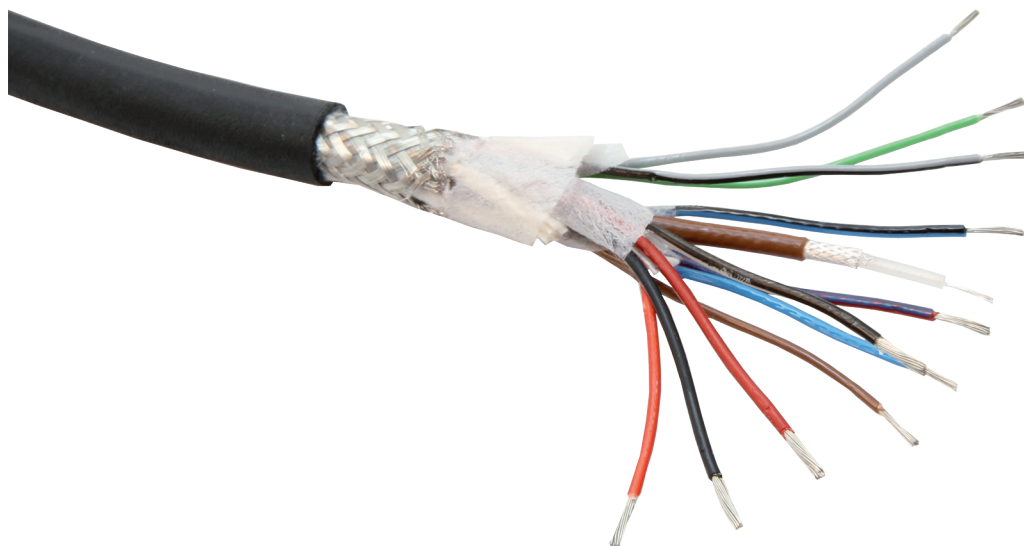

**Cable section**

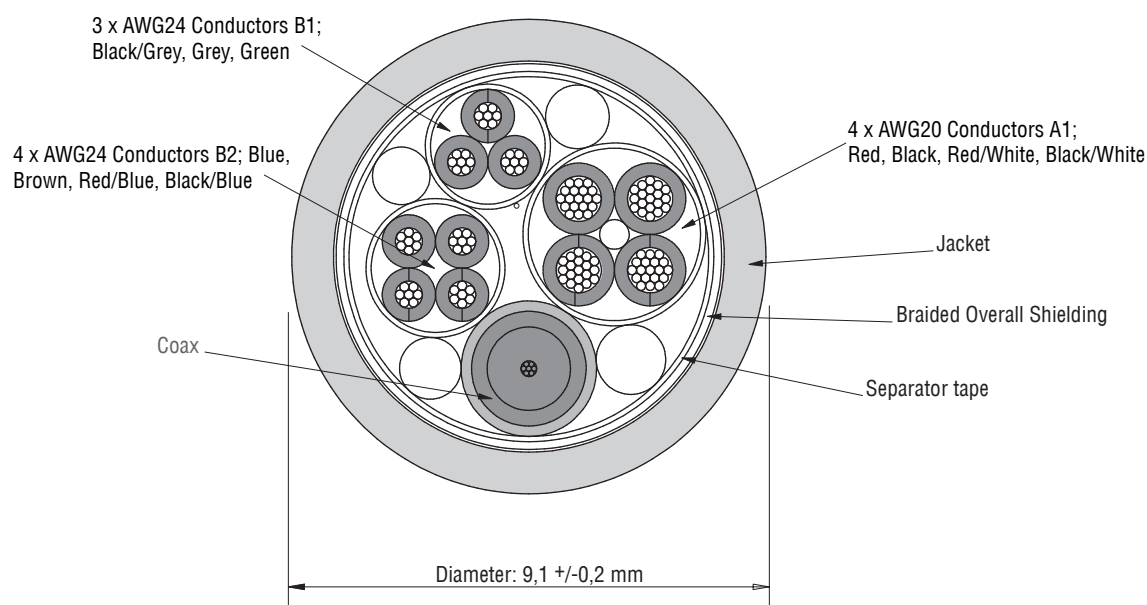

## TECHNICAL DATA

### Cable Base 9B-1CB11W

	<b>Description</b>
<b>Article number</b>	<b>1221300</b>
<b>Coax</b>	75 Ohm RG179, 7 x 0,10mm, silver plated copper, Shield: braided 85%, silver plated copper, sheathing: TPE, brown.
<b>Conductor A1</b>	4 x AWG20, tin plated copper, 19 x 0,203mm, Color: Red, Black, Red/White, Black/White.
<b>Conductor B1</b>	3 x AWG24, tin plated copper, 19 x 0,13mm, Color: Green, Grey, Black/Grey.
<b>Conductor B2</b>	4 x AWG24, tin plated copper, 19 x 0,13mm, Color: Blue, Brown, Red/Blue, Black/Blue.
<b>Shielding</b>	Braided, tin plated copper. coverage 85%.
<b>Jacket</b>	PE, overall diameter 9,1 +/-0,2mm, colour: RAL 9002 Black, flame resistant, halogen free.
<b>Temperature range</b>	-40°...+90°C.
<b>Bending radius</b>	2 x Diameter, fixed installation.
<b>Ex applications</b>	This cable is used in an Ex-application; so no changes may be made to the cable or this datasheet. Any changes made in this documentation must be approved by the "Ex" responsible person.
<b>Notes</b>	This Cable Base 9B-1CB11W is compliant to RoHS and REACH directive.

All data subject to change without notice. All dimensions are for commercial purpose only.  
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.  
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

